

# COMBO-D-LUX

Digital timer drain with integrated strainer

## PRODUCT FEATURES

The D-LUX feature is a digital timer setting applied on time controlled condensate drains designed to automatically remove condensate from compressors, compressed air dryers and receivers - up to any size, type or manufacturer.

The COMBO-D-LUX is an all-in-one digital timer drain with an integrated ball valve and strainer.

The unit offers true digital time cycle programming luxury ranging from milliseconds to 99 hours.



## COMMERCIAL BENEFITS

- Wide time setting range, offering you application flexibility
- Exceptionally accurate cycle timing
- Suitable for all types of compressed air systems
- Serviceable valve construction, offering you routine maintenance revenues
- Consult JORC for private labelling options


## TECHNICAL ADVANTAGES

- Integrated mesh strainer for large particles
- Shut off valve incorporated
- Dual threaded inlet (1/4" & 1/2")
- Does not air-lock during operation
- Quick to service
- TEST (micro-switch) feature
- Bright digital illuminated display, offering you a visual indication of current operating cycle

# COMBO-D-LUX

Digital timer drain with integrated strainer

## DIMENSIONS

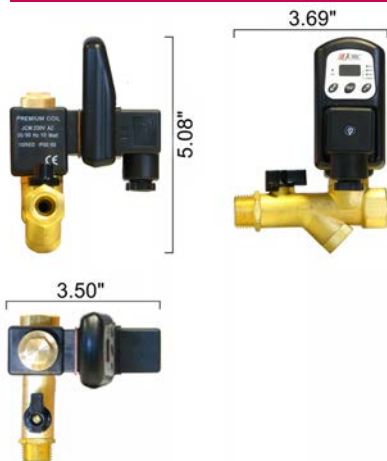

Visual display of current operating cycle



Dual inlet feature 1/4" & 1/2"

## TECHNICAL SPECIFICATIONS

Max. compressor capacity	Any size
Pressure range	0 - 230 psi (0 - 16 bar) higher pressure available, see OPTIMUM-HP
Supply voltage options	12 - 380 VAC/DC 50/60HZ. (please indicate)
Medium temperature	34 - 131 °F (1 - 55 °C)
Ambient temperature	34 - 131 °F (1 - 55 °C)
Timer cycle range (On/OFF)	0,01 second to 99 hours (both ON and OFF)
Timer PCB	SMD technology, ensuring consistency in production
Timer cycle indication	Bright LED illumination
TEST feature	Yes
Valve type	2/2 way, direct acting
Valve orifice	4 mm
Valve seals	FPM
Inlet/outlet connections	1/4" & 1/2" / 1/2" NPT or BSP
Inlet connection height	10 mm
Serviceable valve	Yes
Valve housing material	BRASS (Stainless steel available, see OPTIMUM)
Power connection	DIN 43650-A
Environmental protection	NEMA4 (IP65)



Digital processor, offering you exceptionally accurate cycle timing



Also available in a OPTIMUM valve version

**JORC is NEN - EN - ISO 9001:2015 certified**

Information provided herewith is believed to be accurate and reliable. However, no responsibility is assumed for its use or for any infringement of patents or rights of others, which may result from its use. In addition, JORC reserves the right to revise information without notice and without incurring any obligation.

**JORC Industrial LLC**  
 1146 River Road  
 New Castle, DE 19720  
 USA

Tel +1 302-395-0310  
 Fax +1 302-395-0312  
 E-mail [info@jorc.com](mailto:info@jorc.com)  
 http:// [www.jorc.com](http://www.jorc.com)

