

DISTRIBUTOR

Compressed air condensate distributor

PRODUCT FEATURES

Large compressor systems might require two or more oil/water separators to be installed to match the total compressor capacity of an installation. To connect the oil/water separators together and to ensure an even distribution of condensate in to the oil/water separators, you require the DISTRIBUTOR.

The DISTRIBUTOR ensures an equal distribution of the condensate in to the oil/water separators and the elements are subsequently saturated evenly.

The DISTRIBUTOR has two 1" condensate inlets and six 1/2" outlets with integrated ball valves, allowing you to connect two and up to six oil/water separators.

To service the DISTRIBUTOR simply loosen the 4 top screws and remove the lid. This will give you instant access to the inner working mechanism.

The depressurising chamber ensures compressed air condensate depressurisation and the subsequent distribution into the oil/water separators.



COMMERCIAL BENEFITS

- Allows you to connect multiple SEPREAMIUM oil/water separators
- The equal condensate distribution ensures even filter element saturation
- Streamlining of element servicing intervals


TECHNICAL ADVANTAGES

- A guaranteed even distribution in to oil/water separators
- Removable lid, offering quick access to the inner working mechanism, for servicing purposes
- Two 1" condensate inlet and six 1/2" outlet options
- Integrated ball valves allowing local shut-off for servicing purposes

DISTRIBUTOR

Compressed air condensate distributor

DIMENSIONS

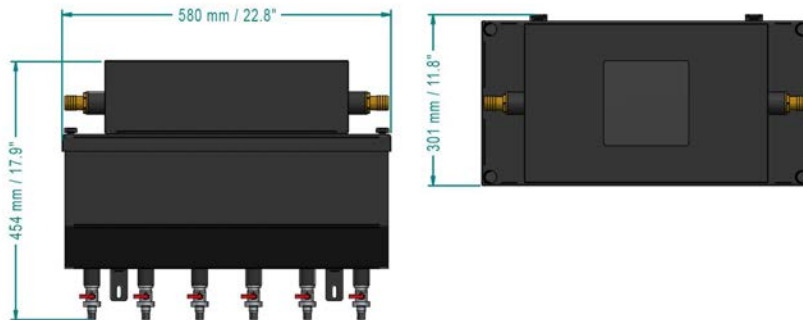

TECHNICAL SPECIFICATIONS

| | |
|---------------------------------------|--------------------------------|
| OIL/WATER SEPARATOR CONNECTION POINTS | 6 |
| CONDENSATE INLET THREAD CONNECTION | 1" BSP (2 off) |
| INLET HOSE CONNECTIONS | 25-26 mm (hose inner diameter) |
| CONDENSATE OUTLET THREAD CONNECTION | 1/2" BSP (6 off) |
| OUTLET HOSE CONNECTIONS | 14-16 mm (hose inner diameter) |
| MAX. SYSTEM PRESSURE | 16 bar (230 psi) |
| INTEGRATED BALL VALVES | Yes |
| HOUSING MATERIAL | Aluminium, powder coated black |



JORC is NEN - EN - ISO 9001:2015 certified

Information provided herewith is believed to be accurate and reliable. However, no responsibility is assumed for its use or for any infringement of patents or rights of others, which may result from its use. In addition, JORC reserves the right to revise information without notice and without incurring any obligation.

JORC Industrial BV
 Pretoriastraat 28
 NL-6413 NN Heerlen
 The Netherlands

Tel: +31 45 5242427
 info@jorc.nl
 www.jorc.eu