

COMBO-QUICKSET

Quick-to-program electronic timer drain with integrated strainer

PRODUCT FEATURES

The QUICKSET feature is a predetermined time setting applied on timer controlled condensate drains designed to automatically remove condensate from compressors, compressed air dryers and receivers - up to 700 cfm compressor capacity and 145 psi pressure.

The COMBO-QUICKSET saves installation time and protects against large particles found in condensate, thanks to the integrated ball valve strainer and the QUICKSET timer adjustability.

Simply adjust the timer according to the compressor capacity and the operating pressure – and go!



Simply select the compressor capacity and pressure!

COMMERCIAL BENEFITS

- Installation time saver thanks to the integrated shut off valve and mesh strainer
- Dual thread inlet (1/2" & 1/4"), offering installation flexibility
- Any type of compressed air system and up to 145 psi
- Serviceable valve construction, offering you routine maintenance revenues
- Consult JORC for private labelling options


TECHNICAL ADVANTAGES

- Integrated mesh strainer, offering valve and orifice protection from larger particles found in condensate
- Integrated shut off valve, offering easy shut off of the valve for routine maintenance
- Does not air-lock during operation
- TEST (micro-switch) feature

COMBO-QUICKSET

Quick-to-program electronic timer drain with integrated strainer

DIMENSIONS

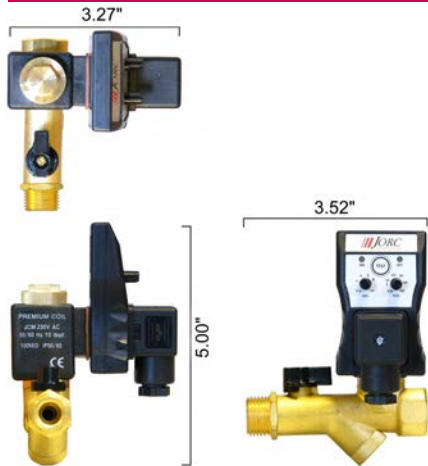

Dual inlet feature
1/2" & 1/4"



Integrated mesh strainer

TECHNICAL SPECIFICATIONS

Max. compressor capacity	Any size
Pressure range	0 - 145 psi (0 - 10 bar) higher pressure available, see OPTIMUM
Supply voltage options	24 - 240 VAC/DC 50/60HZ. please indicate
Medium temperature	34 - 131 °F (1 - 55 °C)
Ambient temperature	34 - 131 °F (1 - 55 °C)
Timer cycle range (ON/OFF)	Simply select capacity and pressure!
Timer PCB	SMD technology, ensuring consistency in production
Timer cycle indication	Bright LED illumination
TEST feature	Yes
Valve type	2/2 way, direct acting
Valve orifice	4 mm
Valve seals	FPM
Inlet/outlet connections	1/4" & 1/2" / 1/2" NPT or BSP
Inlet connection height	10 mm
Serviceable valve	Yes
Valve housing material	BRASS Stainless steel available, see OPTIMUM
Power connection	DIN 43650-A
Environmental protection	NEMA4 (IP65)



Compact design!

JORC is NEN - EN - ISO 9001:2015 certified

Information provided herewith is believed to be accurate and reliable. However, no responsibility is assumed for its use or for any infringement of patents or rights of others, which may result from its use. In addition, JORC reserves the right to revise information without notice and without incurring any obligation.

JORC Industrial LLC
 1146 River Road
 New Castle, DE 19720
 USA

Tel +1 302-395-0310
 Fax +1 302-395-0312
 E-mail info@jorc.com
 http:// www.jorc.com

