

# AIR-SAVER G2

## Compressed air energy saver

### PRODUCT FEATURES

The AIR-SAVER G2 is installed in the compressed air line after the air receiver. The AIR-SAVER G2 opens and closes the air supply to the factory, based on customer specific working shifts.

A typical compressed air system has air losses through pipework connections, leaking float drains, etc.

The AIR-SAVER G2 will open the ball valve at the beginning of a working shift and close the ball valve when the working shift is over. From that point on, all compressed air will remain in the air receiver until the next working shift, rather than being lost through leakages.

The clever and versatile programming feature allows for customer specific settings and is totally adaptable to the working hours of each individual factory.

The AIR-SAVER G2 can be installed in all pipeline systems up to G2. A remote switching kit is available to operate the AIR-SAVER G2 from a distance.



### COMMERCIAL BENEFITS

- At least one air receiver's worth of compressed air savings per day
- No unnecessary compressor start-up during periods when compressed air is not required
- Compressor, dryer and filter activities are reduced during factory closing hours
- Possibility to shut off parts of the pipeline system where compressed air is not needed continuously
- Language selection feature (English, German, Spanish, French and Dutch)
- Each individual day can be programmed according to specific working day shift requirements
- Time programmed or remote controlled
- Manual valve opening and closing possible, in case of a power failure
- Consult JORC for private labelling options


### TECHNICAL ADVANTAGES

- Microprocessor controlled (7 day program feature - multiple cycles possible each day)
- Extended programming features relating to valve open and close cycles (100)
- Slow ball valve rotation 90° in 105 seconds to avoid "water-hammer" when opening or closing
- Brass, nickel plated valve
- Batteries to operate the LCD display and saving the program settings during power failure
- Battery life indication in the display
- Compact design - Easy to install

# AIR-SAVER G2

Compressed air energy saver

## DIMENSIONS

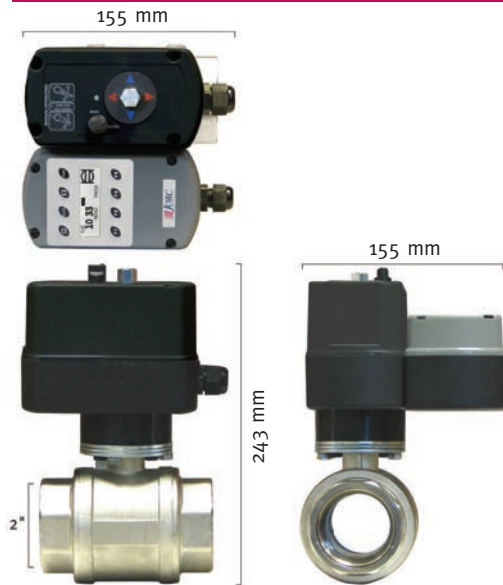

Built-in quartz-controlled timer with LCD display



Remote control option

## TECHNICAL SPECIFICATIONS

Min./max. system pressure 0 - 16 bar  
 Min./max. medium temperature 1 - 100 °C  
 Min./max. ambient temperature 1 - 50 °C

Supply voltage options 115 vac or 230 vac 50/60 hz.  
 Power consumption Approx. 9 w during cycle rotation  
 Enclosure protection rating IP54 (NEMA13)

Valve inlet/outlet connections 2" (BSP or NPT)  
 Valve opening/closing duration 105 sec. (90°)  
 Valve housing material Brass valve, nickel plated

Illuminated lcd display Indicating day, time, valve status, battery  
 Battery type CR2032, 3 volt

Programmable options Week planner, max. 100 switching points, to be distributed over 1-7 days

Manual override Yes  
 Remote controllable Yes (optional)



Manual valve opening and closing possible, in case of a power failure



Brass, nickel plated valve

**JORC is NEN - EN - ISO 9001:2015 certified**

Information provided herewith is believed to be accurate and reliable. However, no responsibility is assumed for its use or for any infringement of patents or rights of others, which may result from its use. In addition, JORC reserves the right to revise information without notice and without incurring any obligation.

**JORC Industrial BV**  
 Pretoriastraat 28  
 NL-6413 NN Heerlen  
 The Netherlands

Tel. +31 45 5242427  
 info@jorc.nl  
 www.jorc.eu

